

dB Accessories

Ensure Proper Application



FOR COMMERCIAL AND RESIDENTIAL USE

Stix Essential® RES Spray Adhesive

Stix Essential RES is a solvent-free, non-flammable spray adhesive recommended for use with luxury vinyl tile and plank, sheet goods, vinyl composition tile (VCT) and modular carpet tiles and resilient flooring in residential and commercial applications. Stix Essential has highly aggressive grab and shear bond strength and outstanding water and plasticizer resistance. This product is designed to secure materials from movement but also allow easy flooring removal for repair or replacement.

Stix Essential can be used with all dB products.



Dri-Seal Tape

Dri-Seal Tape is a flashing tape with a pressure-sensitive acrylic adhesive that maintains performance during exposure to moisture and vapor. Dri-Seal provides excellent tack and holding power to most surfaces, including non-polar and low energy surfaces. It is suitable for bonding and covering of overlaps for various surfaces and meets EnEV (DIN 4108-7) regarding the permanent airtight sealing of vapor barrier sheeting.

Dri-Seal Tape is ideal for use when an impermeable product is required for sealing seams or making repairs.

Testing Data


Total thickness	12 mils
Carrier	Polyethylene
Perm Rating	.09 U.S. Perms
Adhesive	Acrylic adhesive
Service Temp.	40°C-100°C
Elongation	300%
Color	Black

ACCESSORIES CONTINUED

dB ISO Damper

dB ISO Damper is a moldable putty designed to seal penetrations such as electrical outlets, HVAC ducts, water hookups and cables to help maintain the acoustical performance of the wall. dB ISO Damper is clean, easy to use and doesn't require any tools. It adheres to most construction materials, providing a high-quality seal. dB ISO Damper has minimal shrinkage and will not dry out. It is noncorrosive to metal and plastics.

Testing Data	
Thickness	1/8" (3mm)
Width	6" (152.4mm)
Length	8" (203.3mm)
Weight	1 oz./in ³
Color	Gray
Unit size	10 pads/box
STC	46

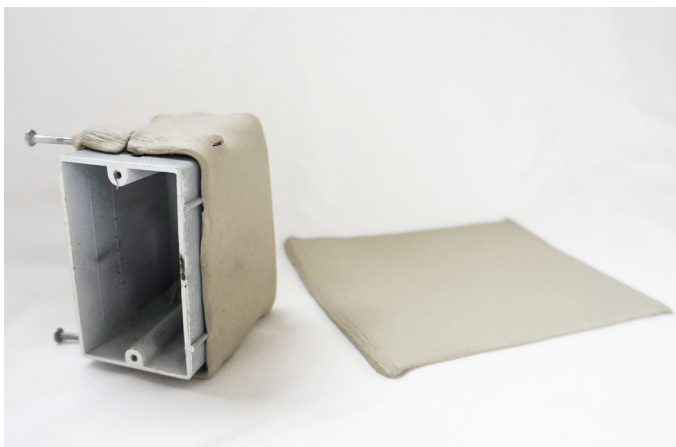

dB ISO Strip

dB ISO Strip is a non-reinforced mass loaded vinyl acoustic barrier designed to block flanking noise between a floor and wall. It is flexible, transformable and specially formulated to be free of hazardous lead and heavy metals. Easy to install and provides enhanced noise control.

Testing Data	
Thickness	0.08"
Width	3.5" and 5.5"
Length	25' – 0"
Weight	1 lb./sq. ft.
Color	Black
STC	26

Seam Seal Tape

Seam Seal Tape is a heavy-duty polyethylene tape coated with a high tack acrylic adhesive. It is designed for splicing, seaming various fabrics, surface protection and patching PE and woven films. Seam Seal bonds well to most surfaces over a wide temperature range and maintains a water resistant seal in all weather conditions. It is tough, conformable and leaves little to no residue upon removal from most surfaces. Seam Seal hangs and tears straight, is curl resistant and has an easy unwind.

Seam Seal Tape is designed to secure seams or for seam splicing. Impermeable seams require Dri-Seal Tape.

Testing Data	
Total thickness	7.0 mils
Carrier	Polyethylene
Tensile	18 lbs./in.
Adhesive	Acrylic adhesive
Adhesion	60 oz./in.
Elongation	80%
Color	White



United Plastics Corporation, Inc.
511 Hay Street
P.O. Box 807
Mount Airy, NC 27030

Phone: 336-786-2127
www.unitedplastics.com

© 2019 United Plastics Corporation